




New Jersey Aluminum
Part No. F-14-7-DF-A
(For Precast Manholes
Only)

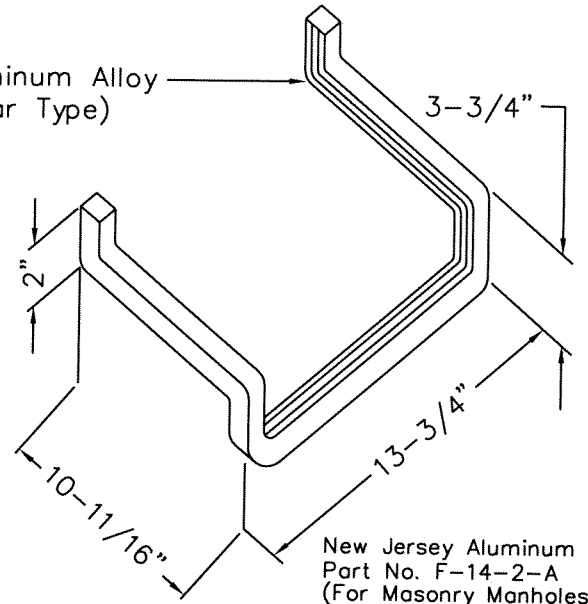

New Jersey Aluminum
Part No. F-14-2-A
(For Masonry Manholes
Only)

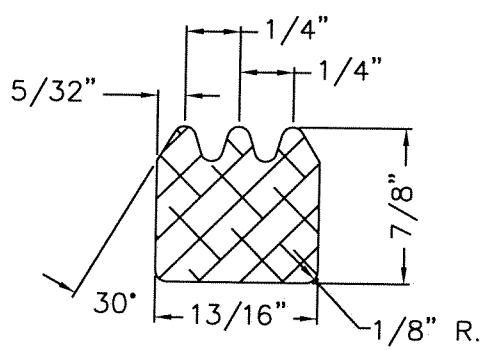

Typical Cross Section
Of Steps

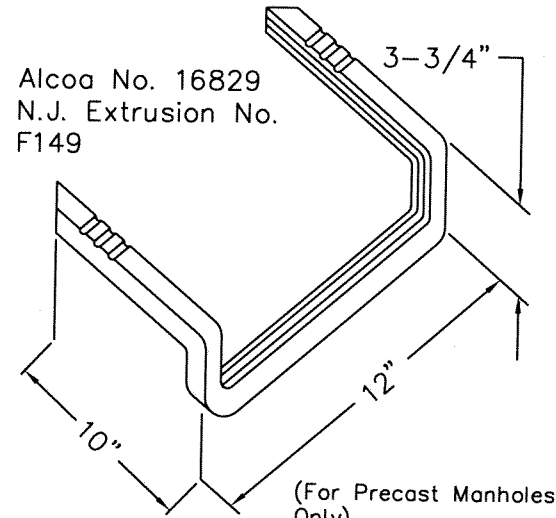


Alcoa No. 16829
N.J. Extrusion No.
F149

(For Precast Manholes
Only)

Notes:

1. Steps Shall Be Extruded Aluminum. Aluminum Shall Be Aluminum Alloy Conforming To ASTM B221 Alloy 6061-T6 As Manufactured By D & D Products, Uhrichville, Ohio 44683.
2. Minimum Embedding Depths:
F-14-2-A 4"
F-14-7-DF-A Per ASTM-C-478 (Currently 3")
3. Embedded Portion Of Steps Shall Be Coated With Zinc Chromate Or An Approved Equal.

APPROVAL	REVISED	TOWN OF EASTON AND EASTON UTILITIES STANDARD DETAILS MANHOLE STEPS ALUMINUM
 EU MANAGER OF ENGINEERING DATE	MAR 1, 94	
	AUG 1, 94	
ISSUED: MAY 1, 1986	STANDARD NO.	SS-3.00